DURACELL CLASSIC


MN2400
Size: AAA (LR03)

Alkaline-Manganese Dioxide Battery


Zn/MnO_2




Nominal voltage	1.5 V
Impedance	119 m-ohm @ 1 kHz
Typical weight	11 g (0.4 oz)
Typical volume	3.5 cm^3 (0.2 in^3)
Terminals	Flat
Storage temperature range	5ºC to 30ºC (41ºF to 86ºF)
Operating temperature range	-20ºC to 54ºC (-4ºF to 130ºF)
Designation	**ANSI:** 24A **IEC:** LR03

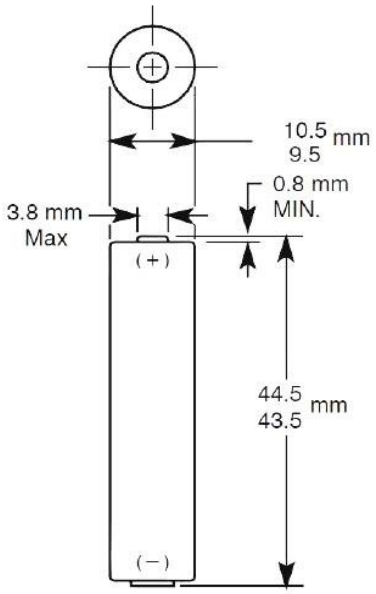

Dimensions shown are ANSI standards

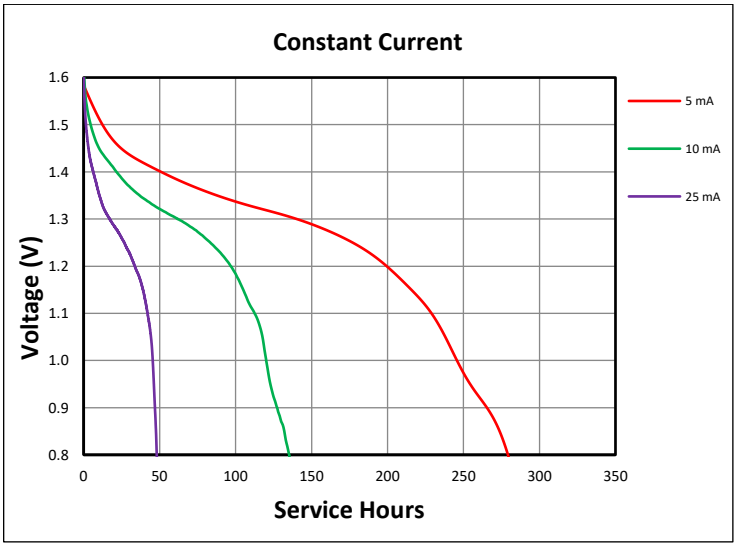

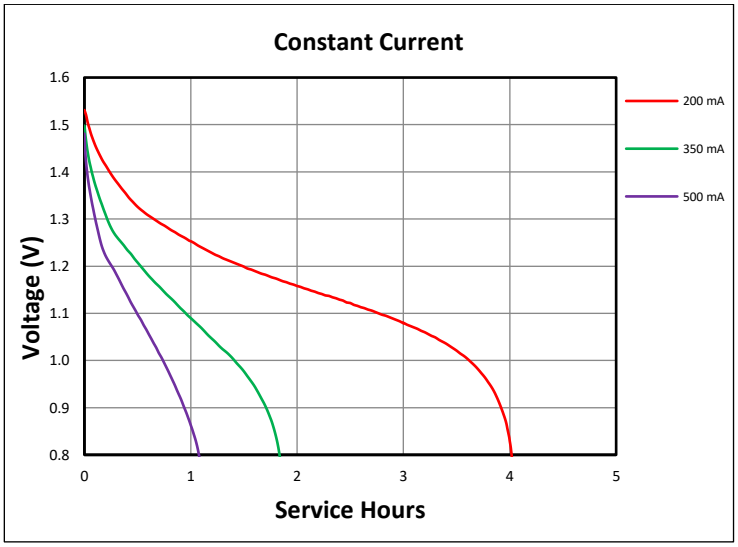

DURACELL® BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


DURACELL CLASSIC


MN2400
Size: AAA (LR03)


Alkaline-Manganese Dioxide Battery

Zn/MnO_2

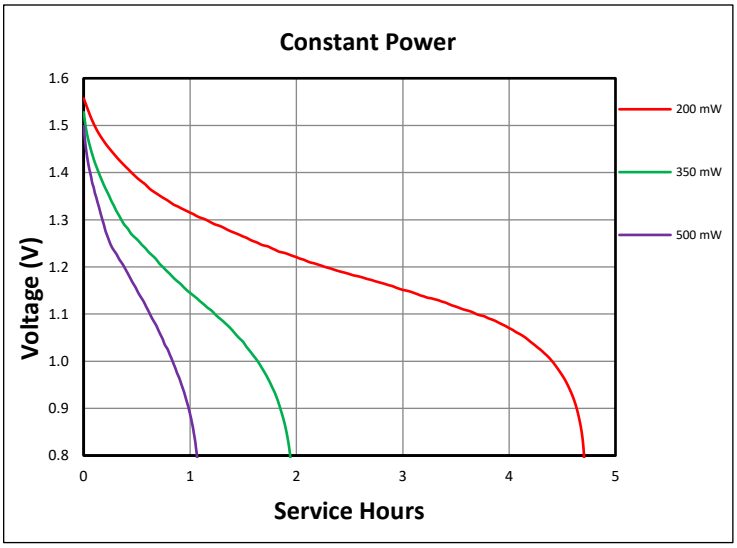

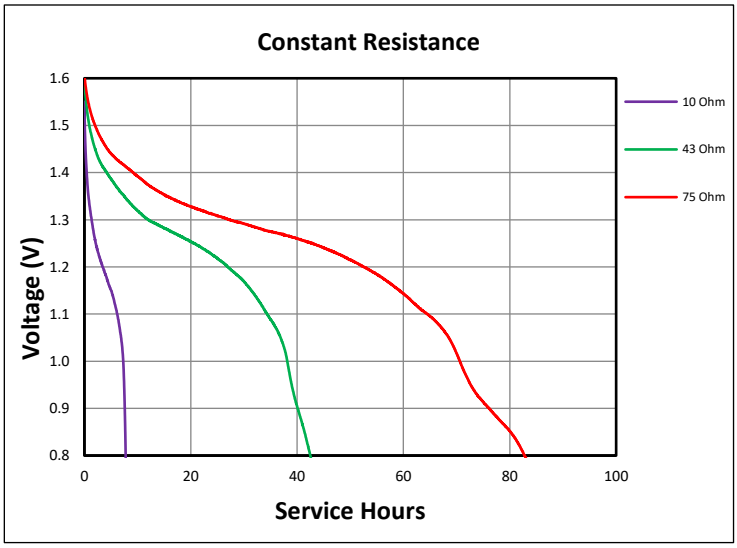

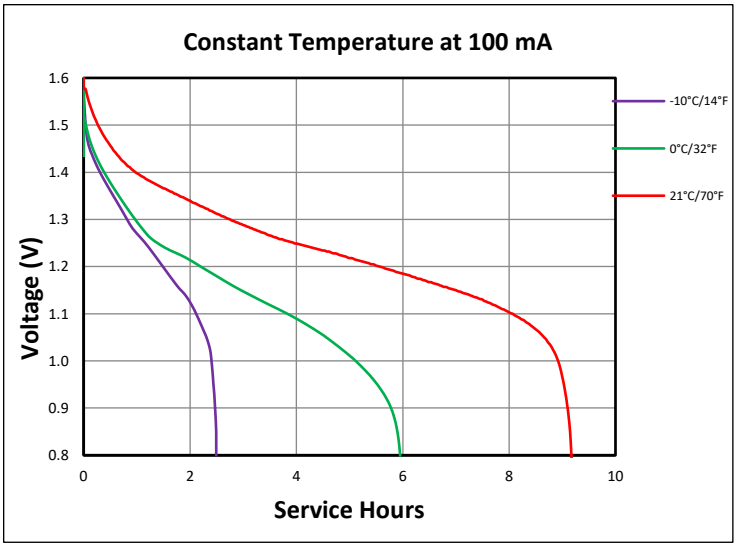

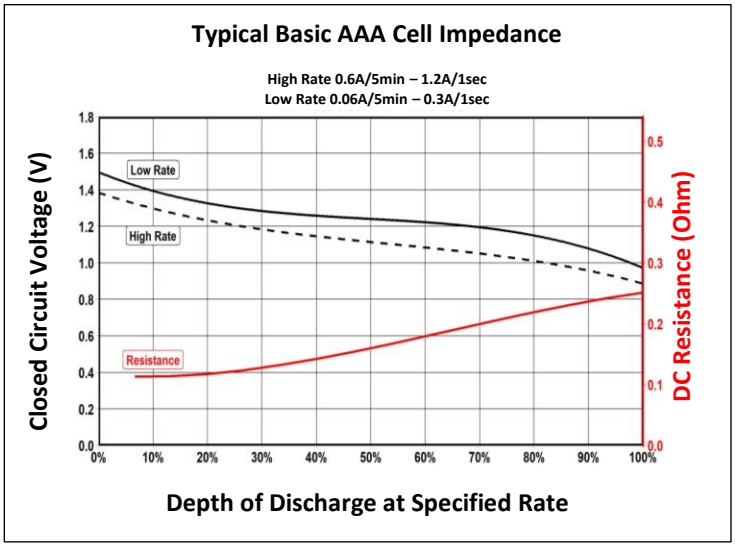

DURACELL BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.